


MOLDING POWER INDUCTORS
HIGH CURRENT INDUCTORS
-EPIT03020 SERIES



● FEATURE



1. Shielded construction
2. Frequency range up to 5MHz, Low DCR(Ω), Low Buzz Noise

● Applications

1. Notebook, server application, High current power supplier

● Shape and Dimension

● Schematics and Land Patterns(mm)

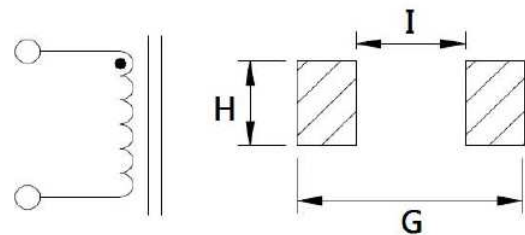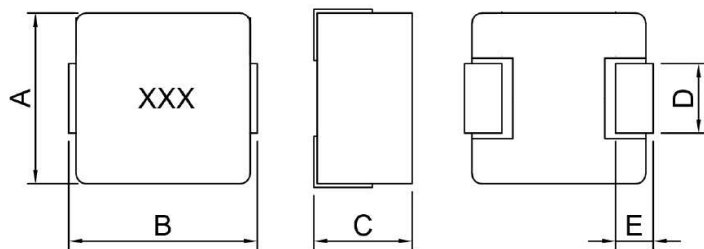

A=3.40mm Max ; B=3.70mm Max ; C=2.00mm Max. ; D=1.20±0.2mm ; E=0.70±0.2mm ;
 G=4.10mm ; H=1.45mm ; I=1.90mm

● Specification

P/N	L (μ H)	Marking code	RDC (m Ω) Typical	RDC (m Ω)Max	Isat (A)	Irms (A)
EPIT03020-R47□	0.47	0.47	19.7	23.0	9.0	7.0
EPIT03020-R68□	0.68	0.68	25.5	29.0	7.0	5.5
EPIT03020-1R0□	1.0	1.0	32.0	38.0	5.0	4.0
EPIT03020-1R5□	1.5	1.5	42.0	50.0	4.0	3.8
EPIT03020-2R2□	2.2	2.2	65.0	75.0	3.7	3.5
EPIT03020-3R3□	3.3	3.3	125	145	3.5	3.0
EPIT03020-4R7□	4.7	4.7	172	200	3.0	2.6
EPIT03020-5R6□	5.6	5.6	205	238	2.6	2.2
EPIT03020-6R8□	6.8	6.8	260	300	2.2	1.9
EPIT03020-8R2□	8.2	8.2	340	390	1.9	1.6
EPIT03020-100□	10	10	366	422	1.6	1.4

Note1. Measurement frequency of Inductance value : at 100KHz, 1V

Note2. Measurement ambient temperature of L, DCR and IDC : at 25°C


Note3. Isat: DC current at which the inductance drops 30%(typ) from its value without current

Note4. Irms: Average current for 40°C temperature rise from 25°C ambient(typical)

Note5. Inductance tolerance□: M: ±20% ; N: ±30%

Note6. Packing: reel ; Quantity: 3000 Piece


Note7. Inductance: 2R2=2.2uH ; Marking code: 2.2



GENERAL CHARACTERISTICS

1. Operating temperature range: -55 TO +125°C (Includes temperature when the coil is heated)
2. External appearance: On visual inspection, the coil has no external defects.
3. Terminal strength: After soldering. Between copper plate and terminals of coil. Push in two directions of X.Y withstanding at below conditions.



Terminal should not peel off. (refer to figure at right) 5. 0N 60 sec.

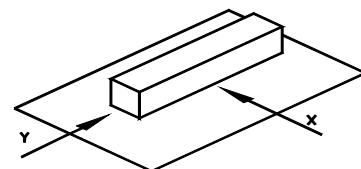

4. Insulating resistance: Over 100MΩ at 100V D.C. between coil and core.
5. Dielectric strength: No dielectric breakdown at 100V D.C. for 1 minute between coil and core.
6. Temperature characteristics: Inductance coefficient (0~2,000)x10-6/°C (-25~+80°C degree Celsius), inductance deviation within±5.0%, after 96 hours.
7. Humidity characteristics(Moisture Resistance): Inductance deviation within ±5%, after 96 hours in 90~95% relative humidity at 40 ±2°C and 1 hour drying under normal condition.
8. Vibration resistance: Inductance deviation within ±5%, after vibration for 1 hour. In each of three orientations at sweep vibration (10~55~10 Hz) with 1.5mm P-P amplitudes.
9. Shock resistance: Inductance deviation within ±5%, after being dropped once with 981m/s2 (100G) shock attitude upon a rubber block method shock testing machine, in three different orientations.
10. Resistance to Soldering Heat: 260°C, 10 seconds(See attached recommend reflow)
11. Storage condition: Temperature Range: 0°C ~ 35°C ; -55°C ~ 125°C (after PCB) , Humidity Range: 50% ~ 70% RH
12. Use components within 12 months. If 12 months or more have elapsed, check solderability before use.
13. Reflow profile recommend:

Lead-free heat endurance test

Lead-free the recommended reflow condition

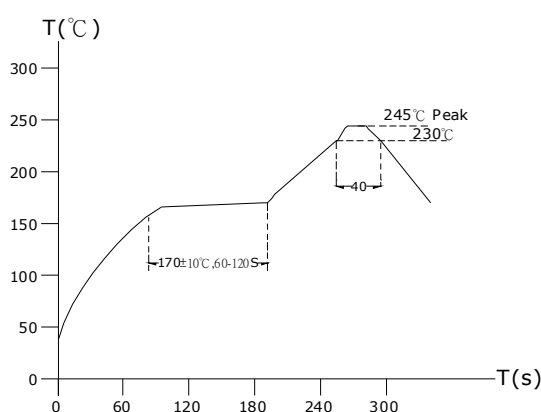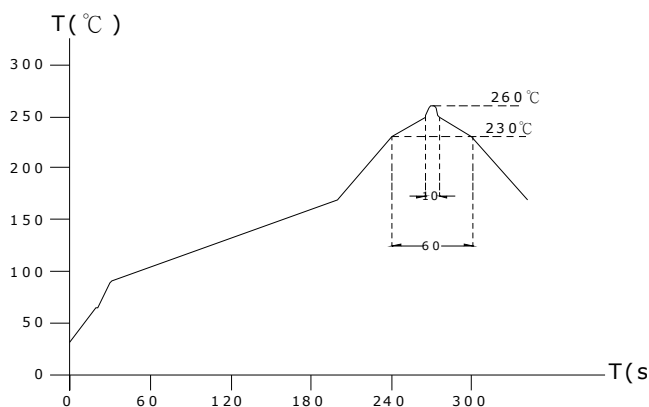




An ISO 9001 Company

MOLDING POWER INDUCTORS


HIGH CURRENT INDUCTORS

-EPIT03020 SERIES




● Typical Electrical Curve: Inductance VS Isat , Irms VS TEMP.


EPIT03020-R47

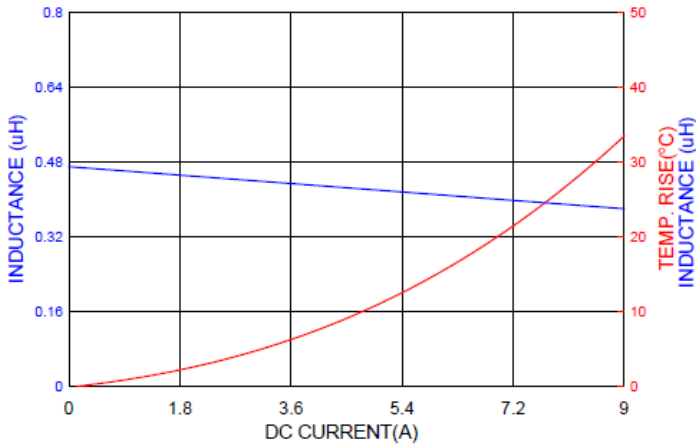


EPIT03020-R68

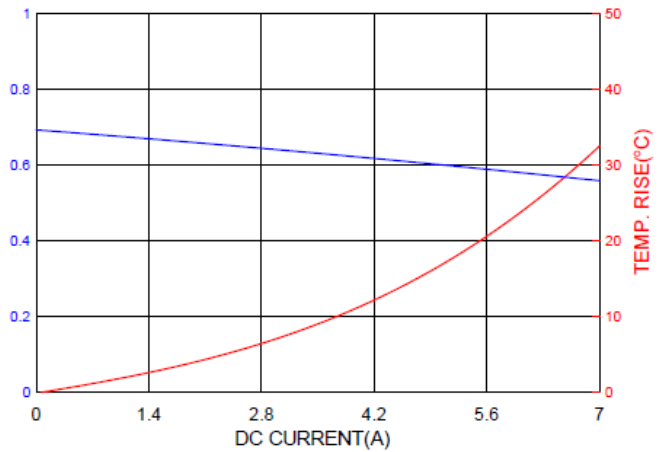


EPIT03020-1R0

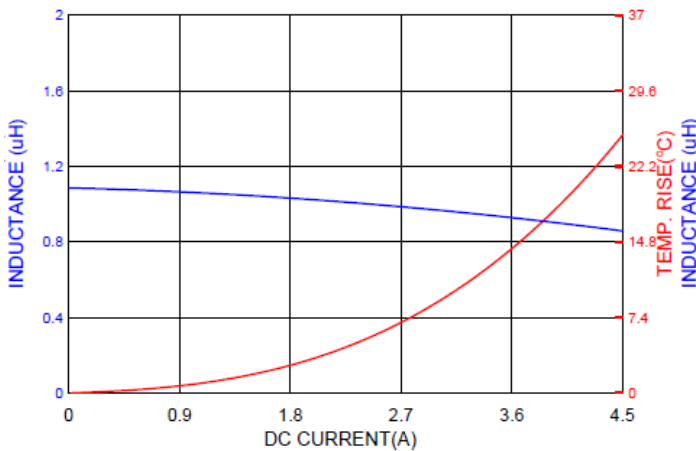


EPIT03020-1R5

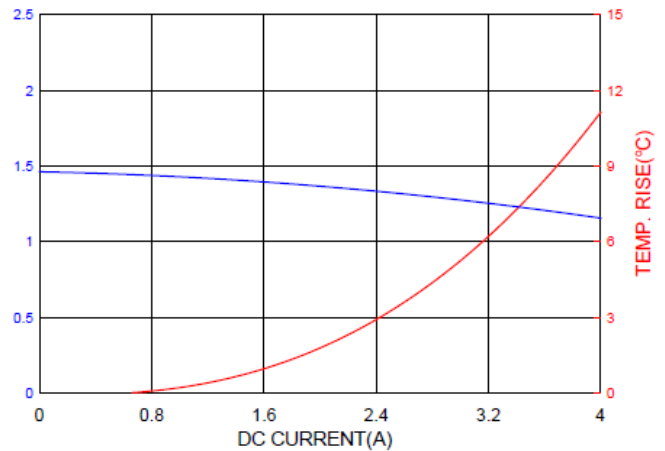

EPIT03020-2R2

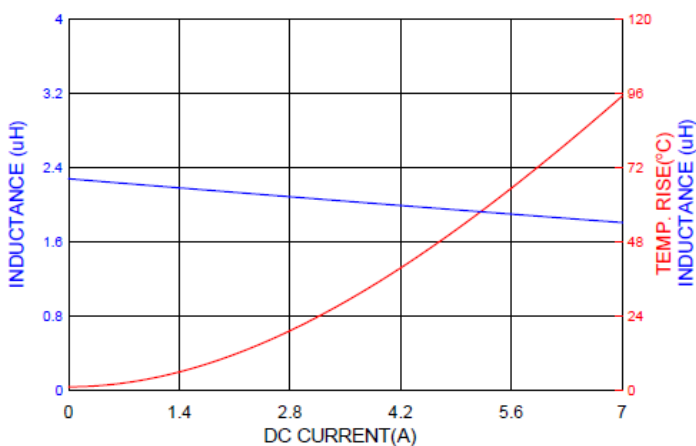


EPIT03020-3R3

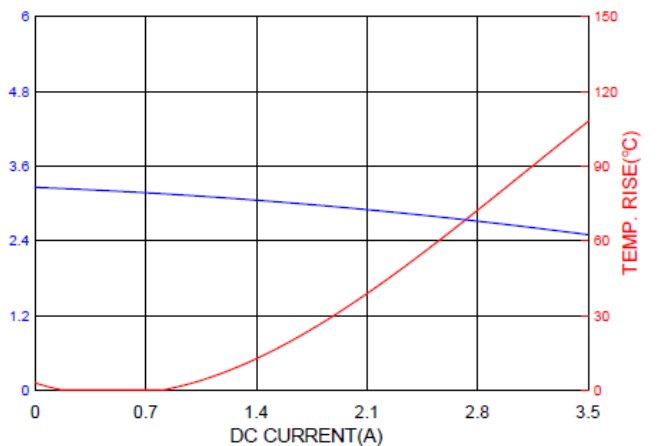




An ISO 9001 Company


MOLDING POWER INDUCTORS HIGH CURRENT INDUCTORS -EPIT03020 SERIES




EPIT03020-4R7

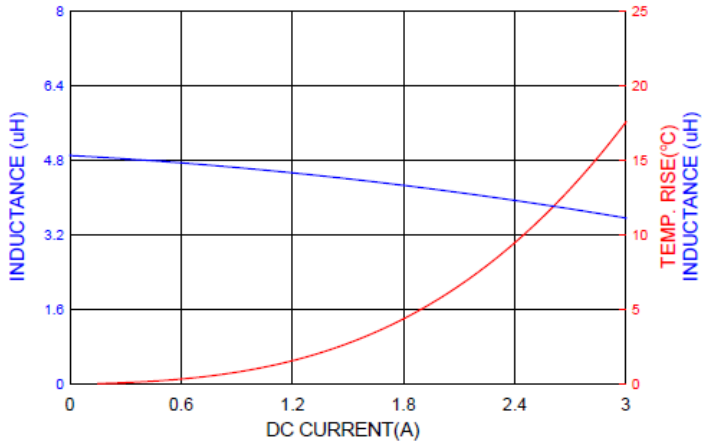


EPIT03020-5R6

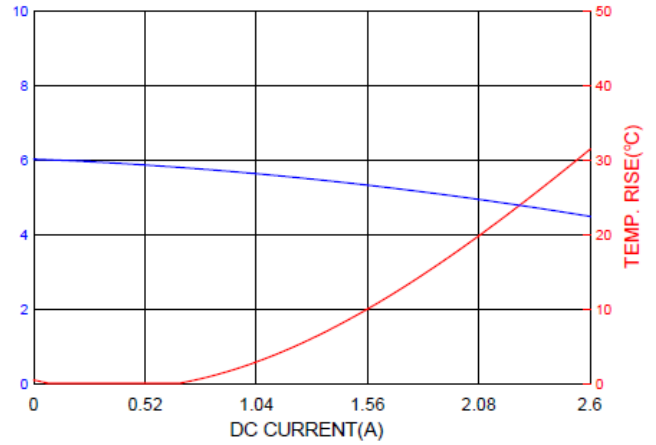

EPIT03020-6R8

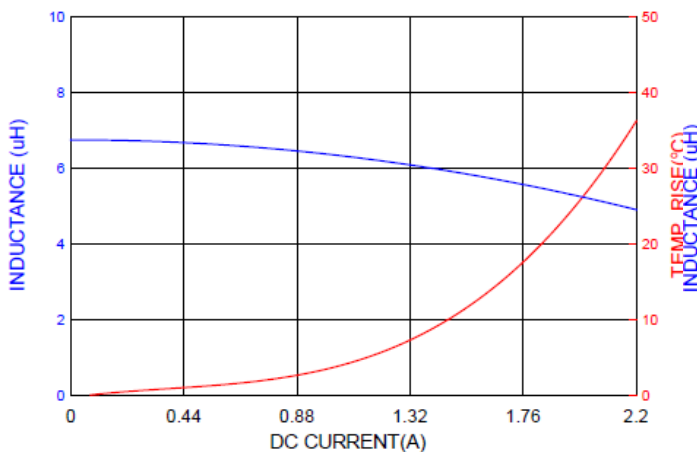

EPIT03020-8R2

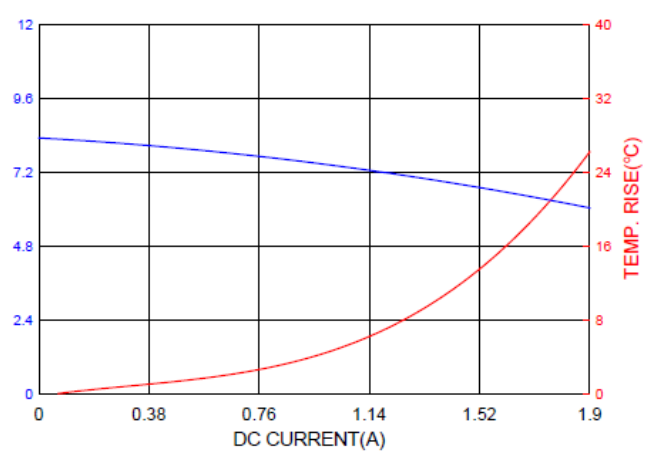

EPIT03020-100

