


AUTOMOTIVE RELAY – ETR JMW SERIES



■ FEATURES

- Smaller size with 2×6A of rated carrying current and double make contact.
- Applicable for automotive electrical systems.
- Distinctive twin relay structure on JM-2 providing high performance for the use of automotive.
- Resistance to environment with shock and vibration.
- Plastic sealed type available.
- Comply with RoHS, REACH and ELV regulations.


■ SPECIFICATIONS

Contact Resistance	Max. 100mΩ at initial value. @1A,6VDC
Contact Capacity	2x6 Amps at 14VDC
Operate Time	10m Sec. Max.
Release Time	10m Sec. Max.
Dielectric Strength	Between coil & Contact: 500VAC at 50/60Hz for one minute Between Contacts: 500VAC at 50/60Hz for one minute
Insulation Resistance	100MΩ Min. at 500VDC


■ COIL SPECIFICATION AT 20°C

Coil Sensitivity	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance (Ω±10%)	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Max. Allowable Voltage (VDC)
JMW-DM	6	133	45	Abt. 0.8	60% Max.	5% Min.	150% (for short time carrying current)
	9	90	100				
	10	74	135				
	12	66.7	180				
	24	33.3	720				
JMW-LM	6	100	60	Abt. 0.6	60% Max.	5% Min.	150% (for short time carrying current)
	9	66.7	135				
	10	55.6	180				
	12	50	240				

AUTOMOTIVE RELAY – ETR JMW SERIES




PART NUMBER SYSTEM

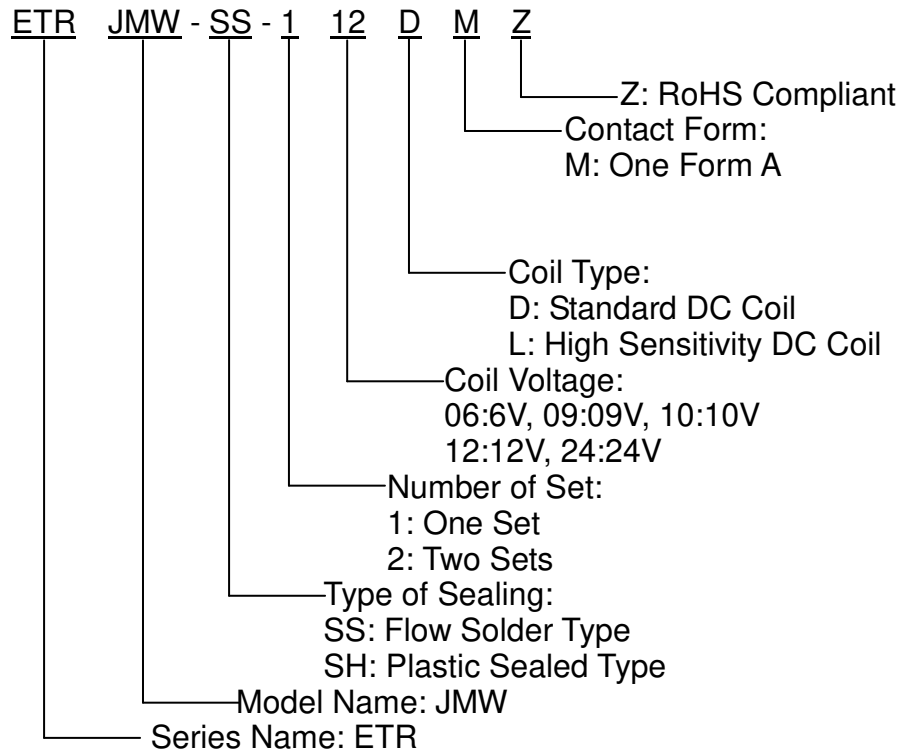

***Marking without: “ETR” & “Z”.**


ETR JMW-SH-206DM

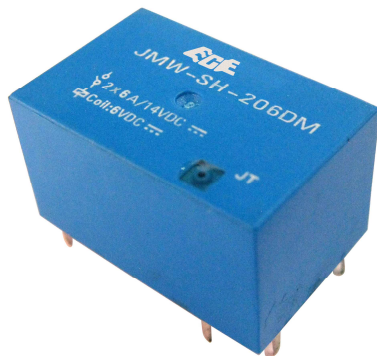

ETR JMW-SH-112DM







AUTOMOTIVE RELAY — ETR JMW SERIES



DIMENSIONS ($\leq 5\text{mm} \pm 0.2\text{mm}$, $> 5\text{mm} \pm 0.3\text{mm}$, the tolerance of PCB thru hole: $+0.1\text{mm}$)





ETR JMW-SS/SH-1

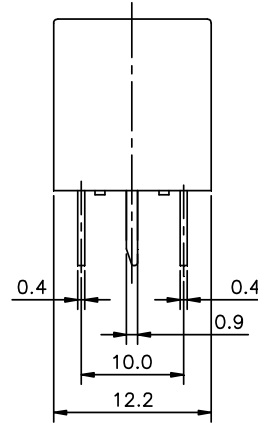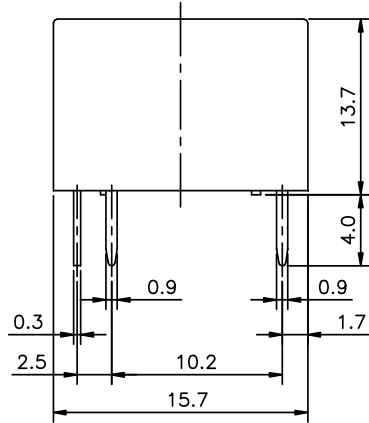

One Form A
BOTTOM VIEW

P.C.B LAYOUT

ETR JMW-SS/SH-2

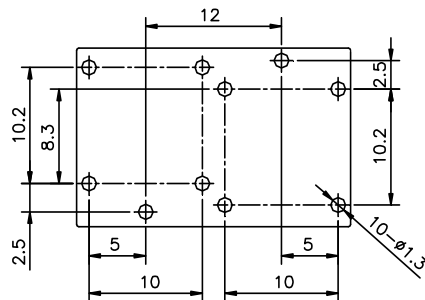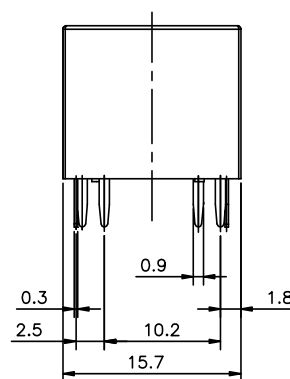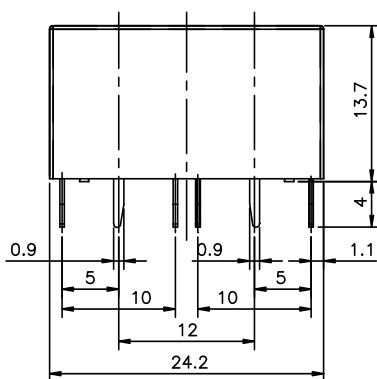

One Form A

BOTTOM VIEW

P.C.B LAYOUT