


GENERAL CONTROL RELAY – ETR RW/RWH SERIES



■ FEATURES

- High switching current up to 15A in small size.
- Sugar-Cube relay suitable for various applications.
- UL, C-UL & TÜV safety standard approved.
- UL Class F insulation available.
- Highly adapt to harsh conditions with high temperature and vibration.
- Halogen Free series available.
- Comply with RoHS and REACH regulations.
- In accordance with IEC 60335-1 Glow Wire requirements for home.


■ SPECIFICATIONS

Contact Resistance		Max. 100mΩ at initial value. @1A,6VDC
Contact Capacity	RW	12 Amps at 120VAC Cosφ=1 10 Amps at 120VAC Cosφ=1 10 Amps at 24VDC L/R=0
	RWH	12 Amps at 250VAC Cosφ=1 (UL) 10 Amps at 277VAC Cosφ=1 (TUV) 15 Amps at 120VAC Cosφ=1 15 Amps at 24VDC L/R=0
Operate Time		10m Sec. Max.
Release Time		5m Sec. Max.
Dielectric Strength		Between coil & Contact: 1000VAC at 50/60Hz for one minute Between Contacts: 500VAC at 50/60Hz for one minute
Insulation Resistance		100MΩ Min. at 500VDC


■ COIL SPECIFICATION AT 20°C

Coil Sensitivity	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance (Ω±10%)	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Max. Allowable Voltage (VDC)
RW/RWH	3	120	25	Abt. 0.36	75% Max.	5% Min.	130%
	5	71.4	70				
	6	60	100				
	9	40	225				
	12	30	400				
	18	20	900				
	24	15	1,600				
	36	10	3,600				
	48	7.5	6,400				

GENERAL CONTROL RELAY — ETR RW/RWH SERIES



■ PART NUMBER SYSTEM

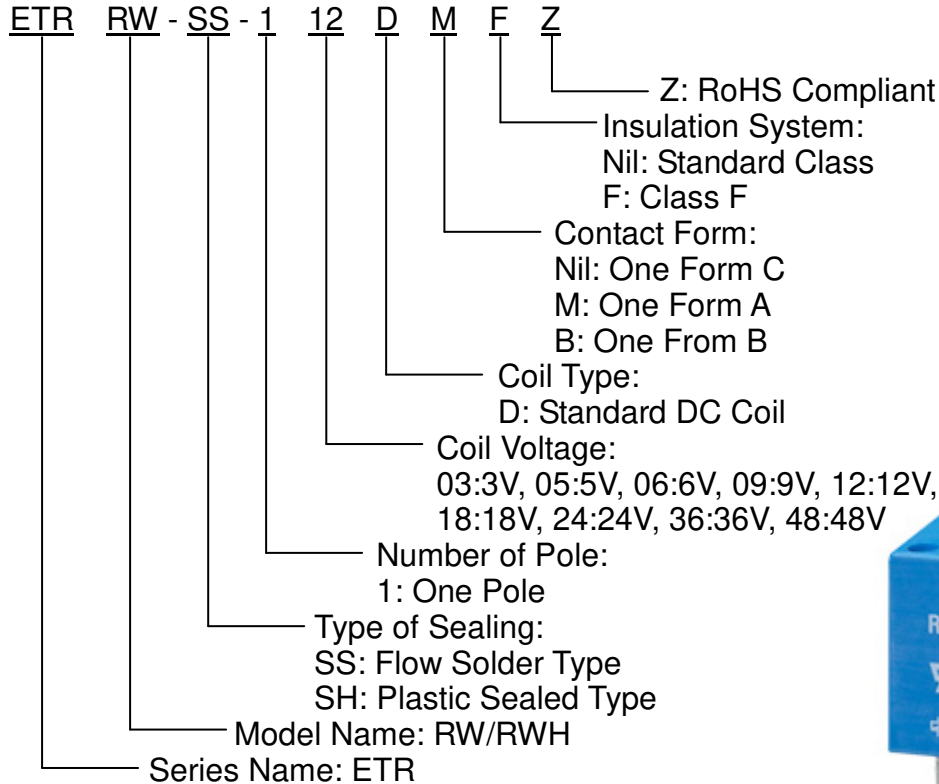

*Marking without: "ETR" & "Z".

■ DIMENSIONS ($\leq 5\text{mm} \pm 0.2\text{mm}$, $> 5\text{mm} \pm 0.3\text{mm}$, the tolerance of PCB thru hole: $+0.1\text{mm}$)

ETR RW(H)-SS/SH

