

● FEATURE


1. Shielded construction
2. Alloy metal material used, Low DCR ,Low Buzz Noise

● Applications

1. Notebook, server application, High current power supplier

● Shape and Dimension

● Schematics and Land Patterns(mm)

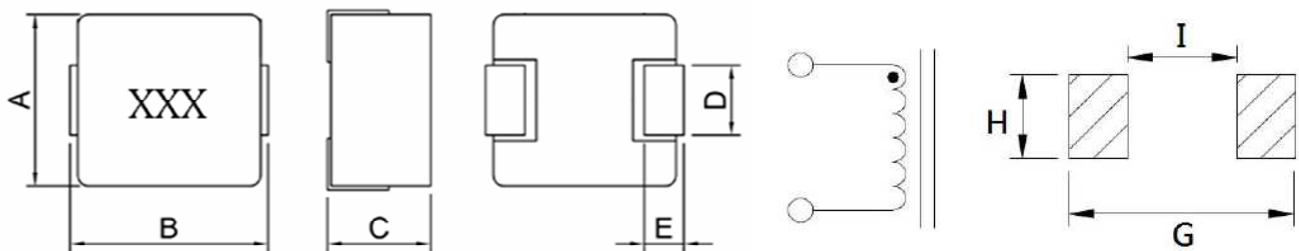

A=6.80m/m Max ; B=7.30m/m Max ; C=3.00m/m Max. ; D=3.00±0.3m/m. ; E=1.60±0.3m/m
 G=8.40m/m ; H=3.50m/m ; I=3.70m/m

● Specification

P/N	L (μ H)	RDC (m Ω) Typical	RDC (m Ω)Max	Isat (A)	Irms (A)
EPIC07030-R47M	0.47±20%	3.5	4.1	20.0	18.0
EPIC07030-R68M	0.68±20%	4.8	5.3	17.0	16.0
EPIC07030-1R0M	1.0±20%	6.7	7.4	15.0	12.0
EPIC07030-1R5M	1.5±20%	10.6	12.1	14.0	12.0
EPIC07030-2R2M	2.2±20%	13.5	15.0	10.0	9.5
EPIC07030-3R3M	3.3±20%	18.0	22.0	9.5	8.5
EPIC07030-4R7M	4.7±20%	28.0	33.0	6.5	6.0
EPIC07030-6R8M	6.8±20%	42.5	48.0	6.0	5.5
EPIC07030-100M	10±20%	62.0	67.0	5.5	4.8
EPIC07030-150M	15±20%	104	115	4.5	3.0
EPIC07030-220M	22±20%	180	200	3.0	2.3

Note1. Measurement frequency of Inductance value : at 100KHz, 1V

Note2. Measurement ambient temperature of L, DCR and IDC : at 25°C

Note3. Isat: DC current at which the inductance drops 30%(typ) from its value without current

Note4. Irms: Average current for 40°C temperature rise from 25°C ambient(typical)

Note5. Inductance tolerance: M: ±20%

Note6. Packaging: Taping ; Quantity: 1500 Piece/reel




An ISO 9001 Company

MOLDING POWER INDUCTORS


HIGH CURRENT INDUCTORS

-EPIC07030 SERIES





GENERAL CHARACTERISTICS

1. Operating temperature range: -55 TO +125°C (Includes temperature when the coil is heated)
2. External appearance: On visual inspection, the coil has no external defects.
3. Terminal strength: After soldering. Between copper plate and terminals of coil. Push in two directions of X.Y withstanding at below conditions.
Terminal should not peel off. (refer to figure at right) 5N. 0N 60 sec.
4. Insulating resistance: Over 100MΩ at 100V D.C. between coil and core.
5. Dielectric strength: No dielectric breakdown at 100V D.C. for 1 minute between coil and core.
6. Temperature characteristics: Inductance coefficient (0~2,000)x10-6/°C (-25~+80°C), inductance deviation within±5.0%, after 96 hours
7. Humidity characteristics(Moisture Resistance): Inductance deviation within ±5%, after 96 hours in 90~95% relative humidity at 40 ±2°C and 1 hour drying under normal condition.
8. Vibration resistance: Inductance deviation within ±5%, after vibration for 1 hour. In each of three orientations at sweep vibration (10~55~10 Hz) with 1.5mm P-P amplitudes.
9. Shock resistance: Inductance deviation within ±5%, after being dropped once with 981m/s2 (100G) shock attitude upon a rubber block method shock testing machine, in three different orientations.
10. Resistance to Soldering Heat: 260°C, 10 seconds(See attached recommend reflow)
11. Storage environment: Storage condition: Temperature Range: 10°C ~ 35°C (Generally: 21°C ~ 31°C) , Humidity Range: 50% ~ 80% RH (Generally: 65% ~ 75%) ; Transportation condition: Temperature Range: -35°C ~ 85°C , Humidity Range: 50% ~ 95% RH
12. Use components within 12 months. If 12 months or more have elapsed, check solderability before use.
13. Reflow profile recommend:

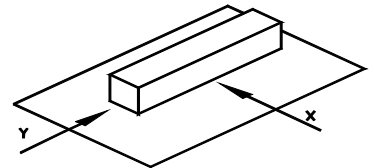

Lead-free heat endurance test

Lead-free the recommended reflow condition

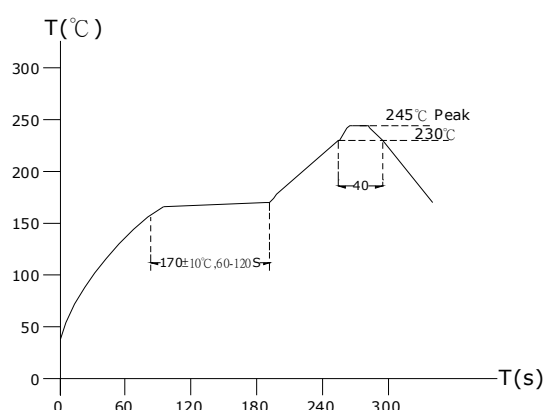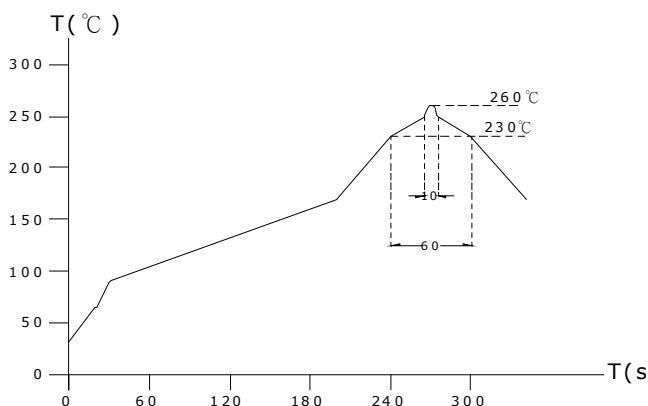




An ISO 9001 Company

MOLDING POWER INDUCTORS


HIGH CURRENT INDUCTORS

-EPIC07030 SERIES




● Typical Electrical Curve: Inductance VS Isat , Irms VS TEMP.


EPIC07030-R47M

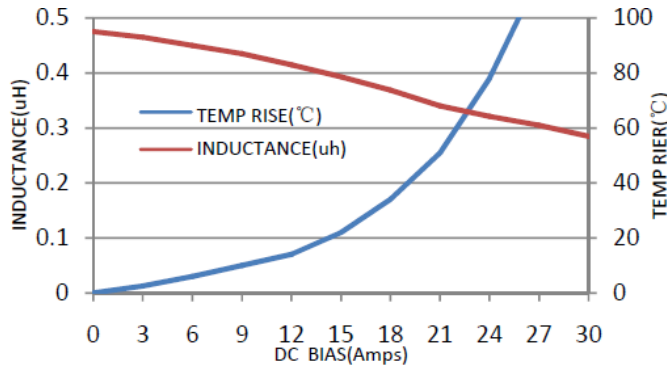


EPIC07030-R68M

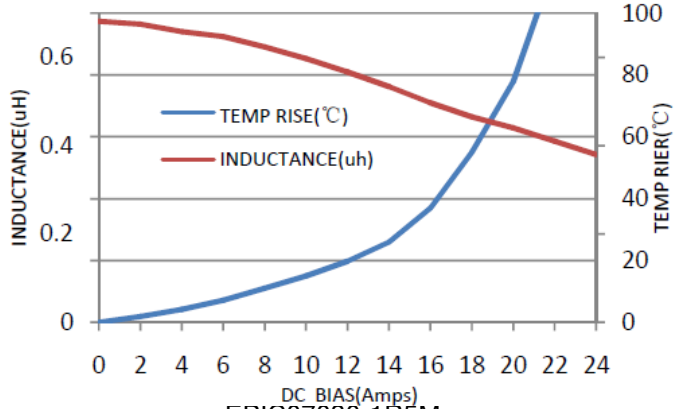


EPIC07030-1R0M

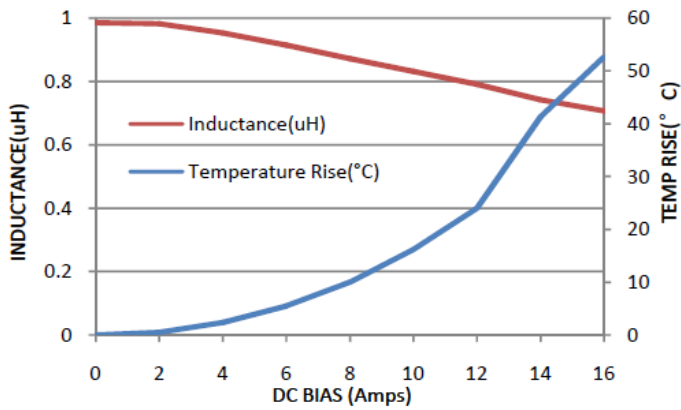


EPIC07030-1R5M

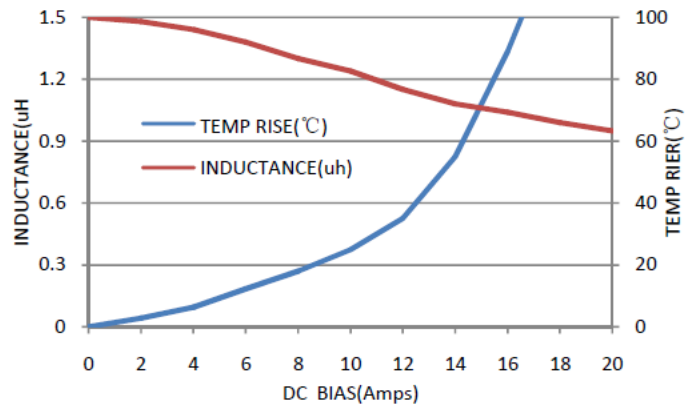

EPIC07030-2R2M

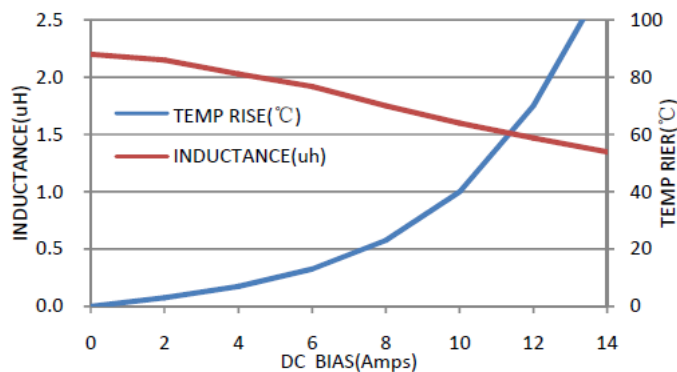

EPIC07030-3R3M

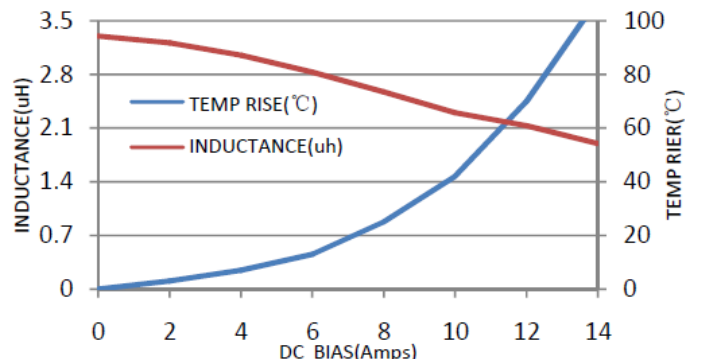




An ISO 9001 Company


MOLDING POWER INDUCTORS

HIGH CURRENT INDUCTORS


-EPIC07030 SERIES




EPIC07030-4R7M

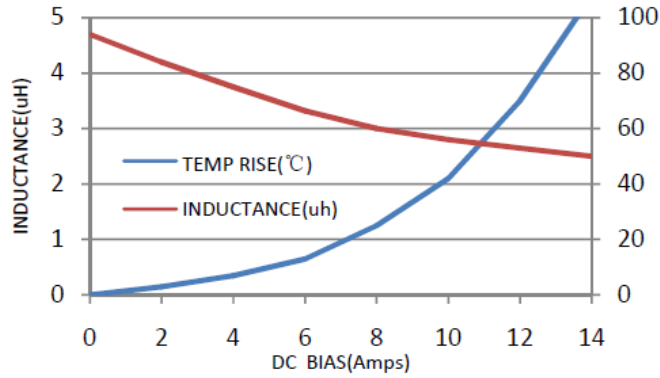

EPIC07030-6R8M

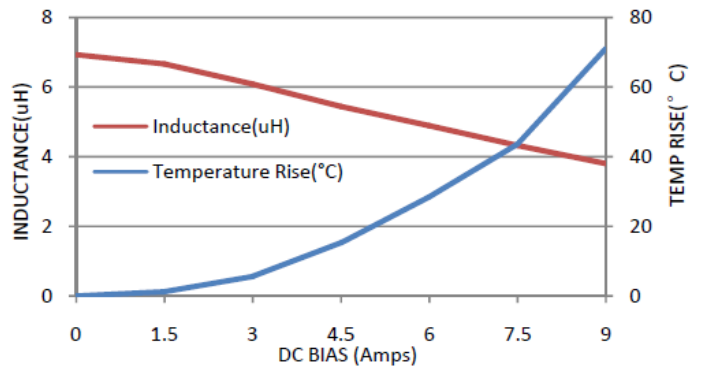

EPIC07030-100M

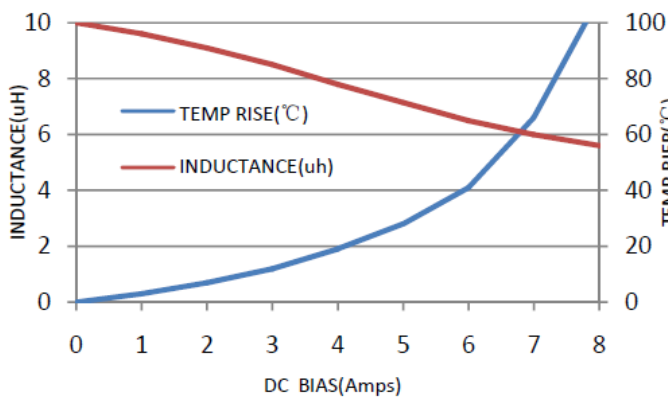

EPIC07030-220M

